



B10/B5 DS8921 Chip replacement

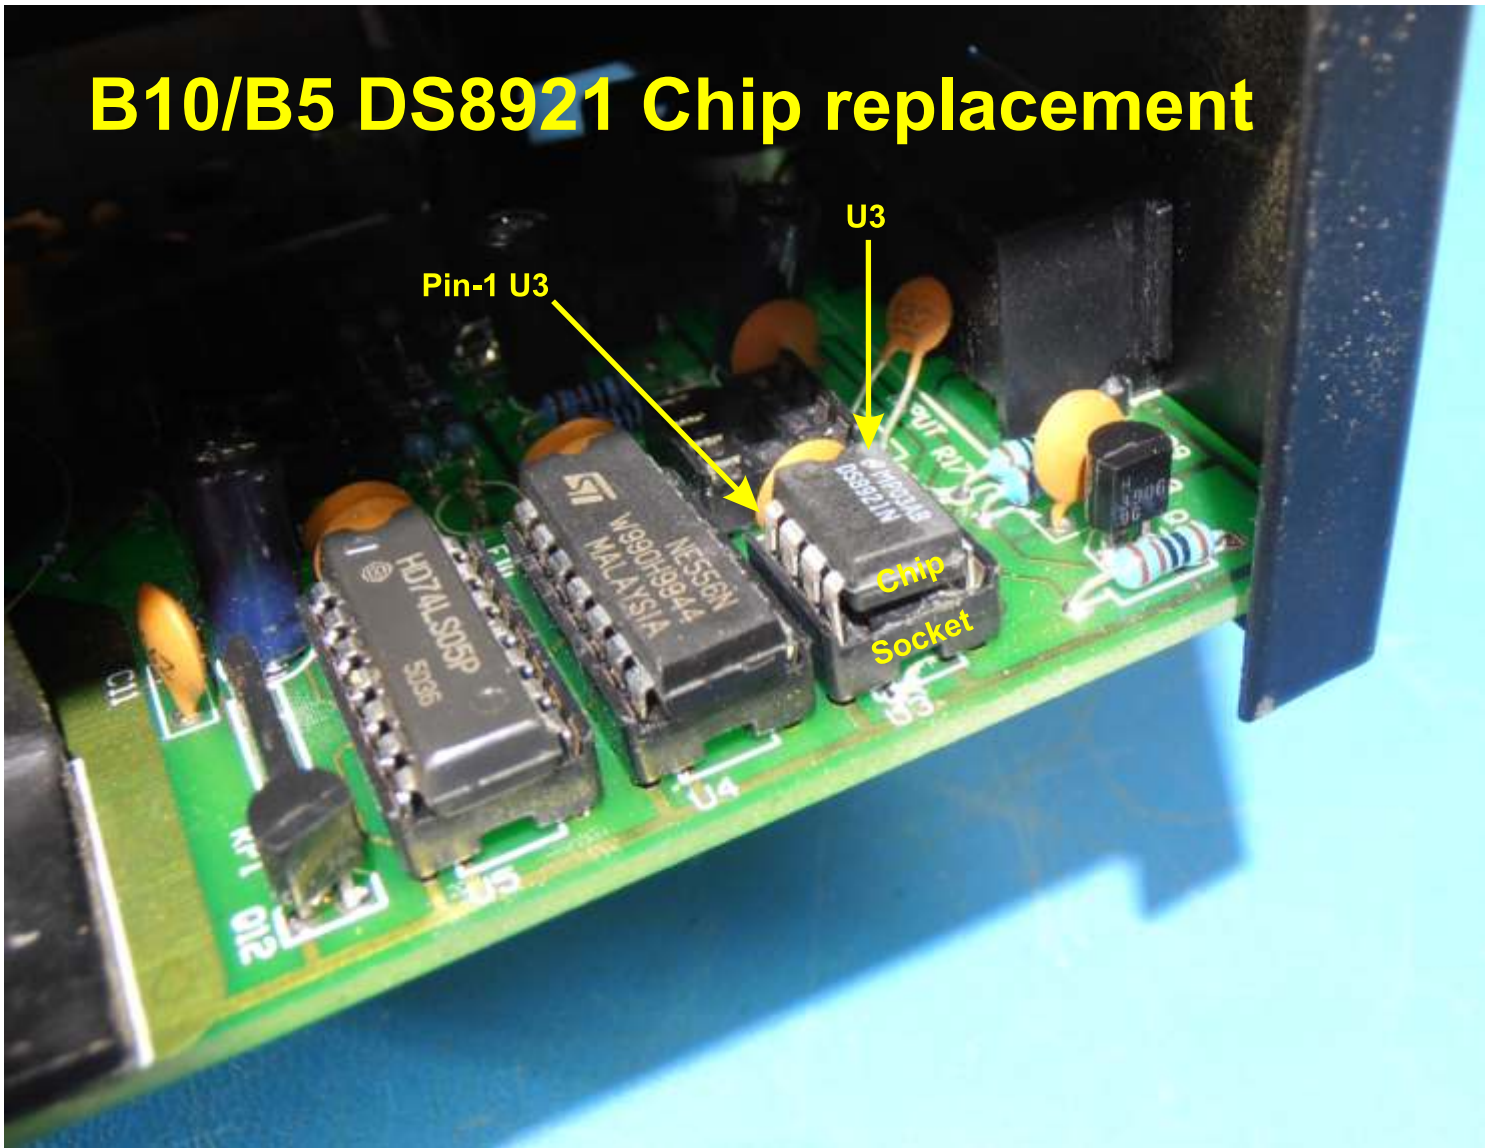

**B10/B5
Component Side**

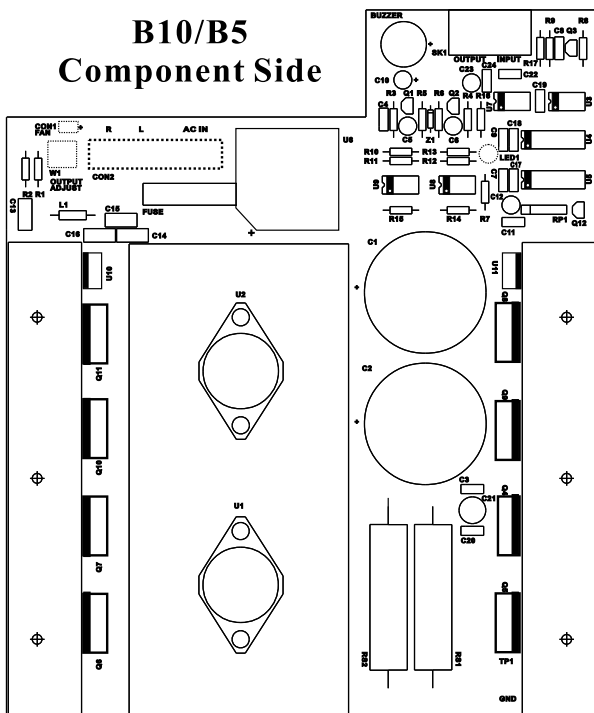

← U3 Location

Remove the cover first. Turn box upside down and oriented like the photo above.

Insert small screwdriver between socket and chip. Pry out old chip. **DO NOT PRY OUT THE SOCKET!**

After confirming correct chip orientation, insert the new chip, oriented with pin 1 as shown. Press down into socket and check that all pins are inside the socket and not bent underneath chip or outside socket.

Discard the old chip.